


HERRINGEBONE

Product description

P J75

Stand: 07.23

Structure

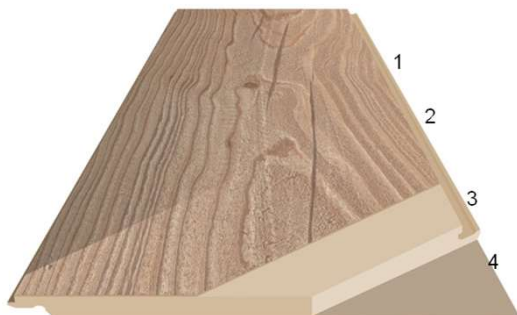


1 Durable, highly abrasion-resistant overlay

2 Decor paper

3 HDF Optima core board

4 Lining

Profile



Loc

Longitudinal profile

Fold Down

Cross profile

Examinations		Flooring ¹ Symbols	Results
Panel dimensions			630x126x8mm
Utilisation class according to requirement	EN ISO 10874 EN 13329		32
Resistance to abrasion	EN 13329		AC5
Resistance to impact stress	small sphere big sphere EN 13329		≥15N ≥1000mm
Formaldehyde content of the carrier board before coating	EN 120 DIBT-Guideline 100		E1
Formaldehyde emission	EN 717-1		< 0,1 ppm
	EN 717-2		< 3,5 mg/h m²

[Europa]

All values given are guidelines - production-related fluctuations cannot be ruled out.

Formaldehyde emission/ VOC			no
Formaldehyde emission	CARB		CARB Phase 2
Edge swelling	EN 13329		≤ 15%
Thermal resistance	ISO 8302		0,0780 m².K/W
Moisture content ex works	EN 322		4 - 7 %
Behaviour against cigarette embers	EN 438-2.18		Grade 4
Light fastness	EN ISO 105-B02 EN 20105 A-02		Better than level 6 blue wool scale Better than level 4 grey scale
Lifting resistance dry	EN 13329		≥ 1,25 N/mm²
Stain resistance	EN 438-2.15		Group 1-2 Grade 5 Group 3 Grade 4
Fire resistance	EN13501-1		Cfl , s1
Sliding friction μ	EN 13893		≥ 0,3
Dimensional stability	EN 13329		Length and width ≤ 0,9 mm
Edge straightness	EN 13329		≤ 0,30 mm / m
Height difference between the joined elements	EN 13329		Max ≤ 0,15 mm Average length ≤ 0,10 mm
Perpendicularity	EN 13329		≤ 0,2 mm / Panel width
Transverse flatness	EN 13329		concave <= 0,2 mm convex <= 0,3 mm concave <= 3 mm
Longitudinal flatness	EN 13329		convex <= 6 mm

¹⁾Information at www.floorsymbols.com